



ROLLON®

BY TIM KEN


Load Capacities

X-Rail

C_{0rad}



C_{0ax}

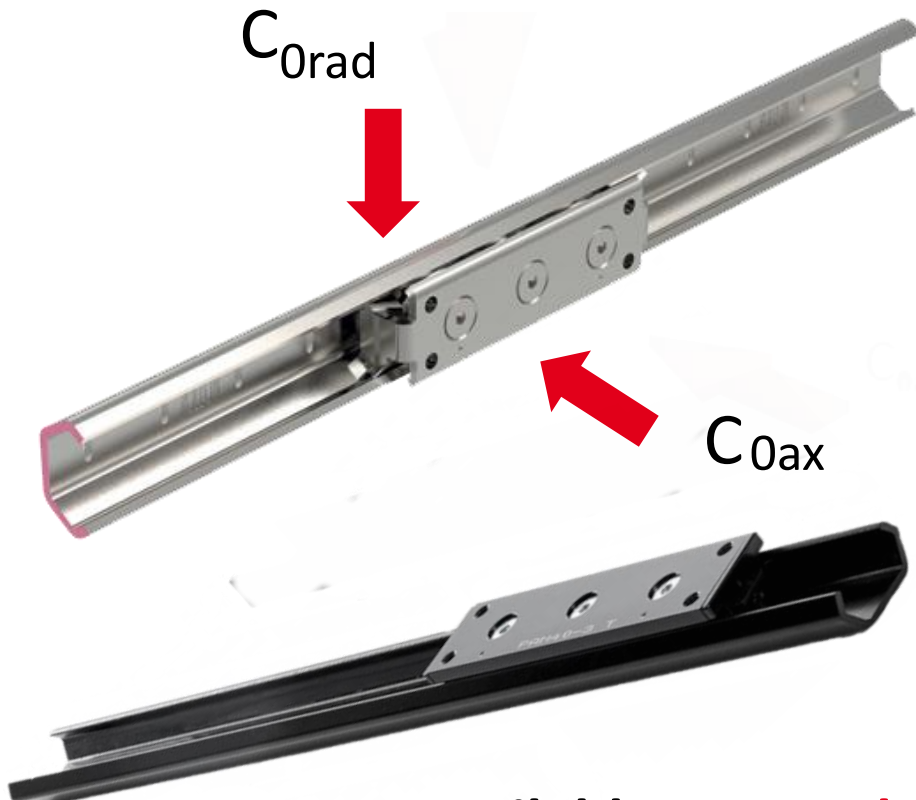

| Rail type | Bearing Carriage | [N] C Orad | [N] C Oax |
|-----------------------------|-------------------------------|------------|-----------|
| TEX-20 (STAINLESS STEEL) | CEX20-80 (3 BEARINGS) S/S | 300 | 170 |
| TEX-30 (STAINLESS STEEL) | CEX20-88 (3 BEARINGS) S/S | 800 | 400 |
| TEX-45 (STAINLESS STEEL) | CEX45-150 (3 BEARINGS) S/S | 1600 | 860 |
| TEN-26 (BLACK OXIDE) | CEN26-92 (3 BEARINGS) | 1120 | 380 |
| TEN-26 (BLACK OXIDE) | CEN26-142 (5 BEARINGS) | 1520 | 540 |
| TEN-40 (BLACK OXIDE) | CEN40-135 (3 BEARINGS) | 2400 | 820 |
| TEN-40 (BLACK OXIDE) | CEN40-195 (5 BEARINGS) | 3240 | 1150 |

Available: **Ex Stock**

*9.81N = 1Kg

Bearing Carriages with DUST SEAL = 2RS Type